

NM24-V



p0044707

Nominal voltage	AC 24 V (from VR...)
Power consumption / For wire sizing	2.5 W / 4.5 VA
Control signal Y	DC 6.0 V ± 4 V (from VR...)
Torque at rated voltage	min. 8 Nm
Direction of rotation	L/R (L ↻ "CLOSE" R ↻) (selected with switch)
Running time for > 90° (or 95°)	110...150 s
Degree of protection	IP54 (bottom cable entry)
Protection class	⚡ (safety extra-low voltage)
EMC	CE according to 89/336/EEC, 92/31/EEC, 93/68/EEC
Sound power level	max. 35 dB (A)

SM24-V



p0045707

Nominal voltage	AC 24 V (from VR...)
Power consumption / For wire sizing	2.2 W / 4 VA
Control signal Y	DC 6.0 V ± 4 V (from VR...)
Torque at rated voltage	15 Nm
Direction of rotation	A/B (A ↻ "CLOSE" B ↻) (selected with switch)
Running time for > 90° (or 95°)	min. 200 s
Degree of protection	IP54 (bottom cable entry)
Protection class	⚡ (safety extra-low voltage)
EMC	CE according to 89/336/EEC, 92/31/EEC, 93/68/EEC
Sound power level	max. 45 dB (A)

AM24-V



p0075810

Nominal voltage	AC 24 V (from VR...)
Power consumption / For wire sizing	2.5/1.2 W / 5 VA
Control signal Y	DC 6.0 V ± 4 V (from VR...)
Torque at rated voltage	18 Nm
Direction of rotation	L/R (L ↻ "CLOSE" R ↻) (selected with switch)
Running time for > 90° (or 95°)	min. 150 s
Degree of protection	IP54 (bottom cable entry)
Protection class	⚡ (safety extra-low voltage)
EMC	CE according to 89/336/EEC, 92/31/EEC, 93/68/EEC
Sound power level	max. 45 dB (A)

GM24-V



p0016707

Nominal voltage	AC 24 V (from VR...)
Power consumption / For wire sizing	3 W / 7 VA
Control signal Y	DC 6.0 V ± 4 V (from VR...)
Torque at rated voltage	30 Nm
Direction of rotation	A/B (A ↻ "CLOSE" B ↻) (selected with switch)
Running time for > 90° (or 95°)	min. 200 s
Degree of protection	IP54 (bottom cable entry)
Protection class	⚡ (safety extra-low voltage)
EMC	CE according to 89/336/EEC, 92/31/EEC, 93/68/EEC
Sound power level	max. 45 dB (A)


LF24-V



p0116110

Nominal voltage	AC 24 V (from VR...)
Power consumption / For wire sizing	2.5 W / 5 VA
Control signal Y	DC 6.0 V ± 4 V (from VR...)
Torque at rated voltage	min. 4 Nm
Direction of rotation	- motor L/R (selected with switch) - spring return L/R (selected by L/R mounting)
Running time for > 90° (or 95°)	motor min. 120 s, spring return ≈ 20 s
Degree of protection / Protection class	IP 54 / ⚡ (safety extra-low voltage)
EMC	CE according to 89/336/EEC, 92/31/EEC, 93/68/EEC
Sound power level	motor max. 35 dB (A), spring ≈ 62 dB(A)

AF24-V

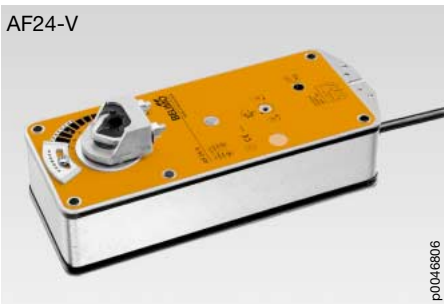

p0046806

Nominal voltage	AC 24 V (from VR...)
Power consumption / For wire sizing	6 W / 10 VA
Control signal Y	DC 6.0 V ± 4 V (from VR...)
Torque at rated voltage	min. 15 Nm
Direction of rotation	- motor L/R (selected with switch) - spring return L/R (selected by L/R mounting)
Running time for > 90° (or 95°)	motor min. 150 s, spring return ≈ 16 s
Degree of protection / Protection class	IP 54 / ⚡ (safety extra-low voltage)
EMC	CE according to 89/336/EEC, 92/31/EEC, 93/68/EEC
Sound power level	motor max. 45 dB (A), spring ≈ 62 dB(A)