



DIFFERENTIAL PRESSURE TRANSMITTER WP-D Series

The WP-D differential pressure transmitter is designed with dual sensors that enables it to accept high pressures ranges in ranges from 5 PSI to 500 PSI. All models can handle overload pressure 2X the maximum full scale range and burst pressure is 5X the maximum full scale range.

Features include field selectable pressure ranges, output signal types, output reversal and damping, port swapping and bidirectional for the most flexible applications. The output signal is factory calibrated and temperature compensated for the highest start-up accuracy.

SPECIFICATIONS:

Media Compatibility	17-4 PH stainless steel
Pressure Ranges.....	4 switch selectable ranges per model - See ordering
Line Pressure	Max. line pressure is the highest of the selectable ranges on each model
Proof Pressure	Max. 2X highest range per model
Burst Pressure.....	Max. 5X highest range per model
Accuracy	± 1% F.S. of range selected with combined linearity, hysteresis, and repeatability
Pressure Cycles	>100 million
Surge Damping	Normal: 4 second averaging Slow: 8 second averaging, switch selectable
Sensor Operating Range	-40° to 85°C (-40° to 185°F)
Compensated Range	0° to 55°C (32° to 130°F)
Operating Environment	0° to 50°C (32° to 122°F), 10-90% RH condensing
Stability	±0.25% typical (1 year)
Zero Adjust.....	Push-button auto-zero and digital input
Operating Humidity.....	0 to 95% RH non-condensing
Power Supply.....	18 to 28 Vac/Vdc (non-isolated half-wave rectified)
Consumption	100 mA max @ 24 Vdc with LCD backlight, 35 mA with backlight disabled
Output Signal.....	3-wire transmitter; selectable 4-20mA active (sourcing), 0-5 or 0-10 Vdc
Pressure Connections.....	1/8" NPT female
Enclosure	ABS, hinged lid with gasket, IP65 (Nema 4)
Dimensions	145 X 100 X 64 mm (5.7" X 3.95" X 2.5")
Shock	100G, 11 mSec, 1/2 sine
Vibration	10G peak 20 to 2000 Hz
Wiring Connections	Screw terminal block (14 to 22 AWG)
Optional LCD Display	35 mm x 15 mm (1.4" w x 0.6" h) alpha-numeric 2 line x 8 character Resolution - 1 psi Backlight - Enable or disable via jumper



PART NUMBER SELECTED

PRODUCT SELECTION INFORMATION:

MODEL	Product Description
WP-D	Differential Pressure Transducer

CODE	Pressure Ranges
101	5, 10, 25 and 50 PSI ranges
102	10, 20, 50 and 100 PSI ranges
103	20, 40, 100 and 200 PSI ranges
104	50, 100, 250 and 500 PSI ranges
105	0.5, 1.0, 2.5 and 5.0 Bar
106	0.75, 1.50, 3.75 and 7.50 Bar
107	1, 2, 5 and 10 Bar
108	3, 6, 15 and 30 Bar
109	50, 100, 250 and 500 kPa
110	75, 150, 375 and 750 kPa
111	100, 200, 500 and 1000 kPa
112	300, 600, 1500 and 3000 kPa

CODE	Option
LCD	Backlit LCD
VB	Valve and bracket assembly (Not available in the USA)

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.

EXAMPLE: Differential pressure, 10, 20, 50,100 psi , w/ LCD


TYPICAL INSTALLATION:

For complete installation and wiring details, please refer to the product installation instructions.


The WP mounts on any surface using the four holes provided on the base of the unit. Make sure there is enough space around the unit to connect the pressure tubing without kinking and avoid locations where severe vibrations or excessive moisture are present.

The unit may be mounted in any position but typically is installed on a vertical surface with pressure ports on the right and the cable entrance on the left. The enclosure has a standard opening for a 1/2" conduit and may be installed with either conduit and a conduit coupler or a cable gland type fitting.

Note: Due to the 2 sensor design of the WP-D Series differential pressure transmitter, pressure equalization on the ports is not relevant and having a greater pressure on one port will not damage the device. Therefore a pressure equalization manifold is not required. The maximum line pressure can not exceed 2x maximum pressure of the device - i.e. for a WP-D-101 max. pressure is 50 PSI, and therefore the max line pressure is 100 PSI.

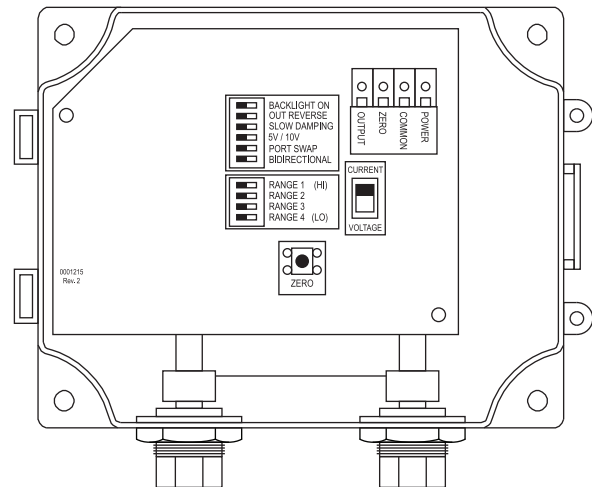

DIMENSIONS:

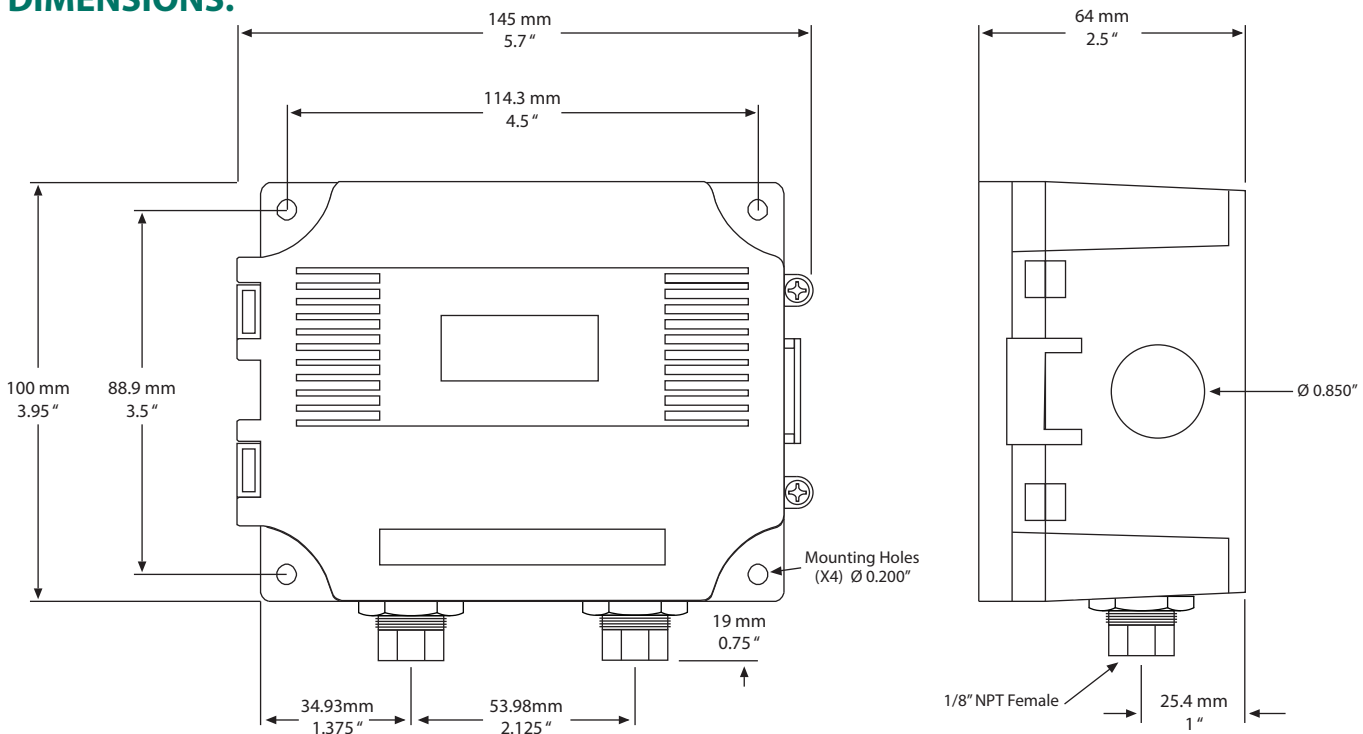

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.



GREYSTONE
 ENERGY SYSTEMS INC

Greystone Energy Systems, Inc.
 150 English Drive, Moncton, NB
 Canada E1E 4G7

(506) 853-3057 Fax: (506) 853-6014
 North America: 1-800-561-5611
 e-mail: mail@greystoneenergy.com
 www.greystoneenergy.com

RoHS
 COMPLIANT



Greystone Energy Systems Inc. is one of North America's largest ISO registered manufacturers of HVAC sensors and transducers for Building Automation Management Systems.

We have conscientiously established a worldwide reputation as an industry leader by maintaining leading-edge technology, prompt technical support, and a commitment to on-time deliveries. We take pride in our Quality Management System which is ISO 9001 certified, assuring our customers of consistent product reliability.

GREYSTONE HAS AN ISO 9001 REGISTERED QUALITY SYSTEM